

Double Dump Valves VDC



THE PERFECT CHOICE FOR SOLVING MATERIAL HANDLING PROBLEMS IN CASE OF HIGH ABRASION, HIGH TEMPERATURE, OVERSIZED CHUNKY OR FIBROUS MATERIALS

VDC Double Dump Valves consist of a robust casing and two alternately activated flaps mounted on top of each other to preserve the pressure differential above and below the valve.

Features

- **Square Inlet Dimensions:**
200x200 mm – 250x250 mm – 315x315 mm – 400x400 mm – 500x500 mm
(8x8” 10x10” 12x12” 16x16” 20x20”)
- **Capacity:**
from 1.2 m³/h up to 17.7 m³/h (from 42.4 CFH up to 625 CFH)
- calculated for 600 activation cycles per hour at 50% loading
- **Ambient Temperature:**
from -10°C up to 50°C (14°F up to 120°F)
- **Working Temperature:**
from -10 °C up to 500°C (14°F up to 930°F)
- **Casing:** available in carbon steel or 304/316 stainless steel
- **Flaps:** available in carbon steel or 304/316 stainless steel, wear-proof rubber-coated or HARDOX® anti-wear steel
- **Hopper:** available in carbon steel or 304/316 stainless steel, wear-proof rubber-coated or HARDOX® anti-wear steel


Accessories

Rotation Indicator



Benefits

- ✓ Easy access for maintenance;
- ✓ Smooth contact surfaces to facilitate cleaning;
- ✓ Highly efficient at high temperatures;
- ✓ Excellent feeding properties.

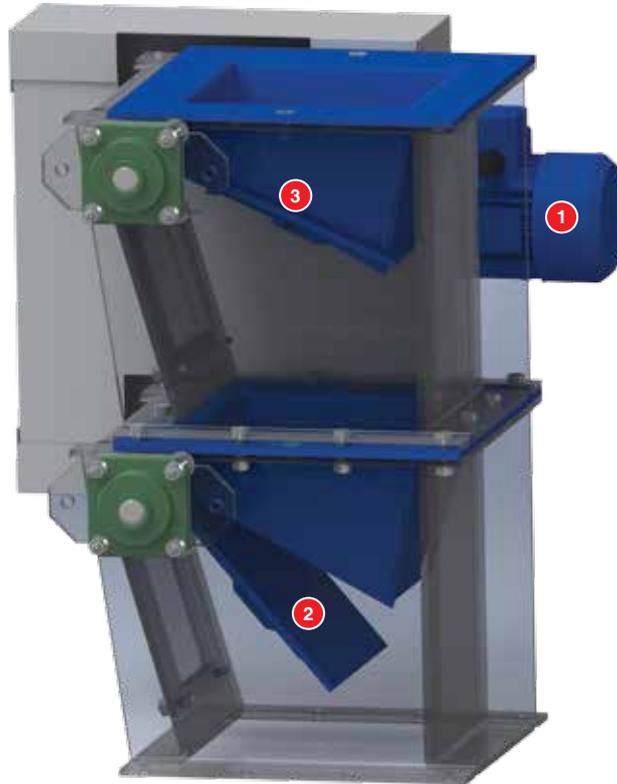


1 CONTROL SYSTEM



MOTOR-OPERATED VALVE:

Flaps are activated by a geared motor and retracted by a spring. Unlike the gravity version, this type allows regular operation to be maintained even with variable product loads. Consequently, it can be used as a metering valve.

2 MOVEABLE FLAP

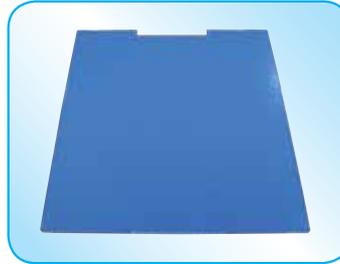


Carbon Steel
304 – 316 Stainless Steel
Wear proof rubber coated
Anti-wear material



PNEUMATICALLY OPERATED VALVE:

Opening and closure of the flaps is enabled by means of pneumatic cylinders. Opening/closure duration can be preset according to the user's requirements. Like the motor-operated VDC, it is possible to maintain regular operation also with variable product loads.

3 INLET HOPPER

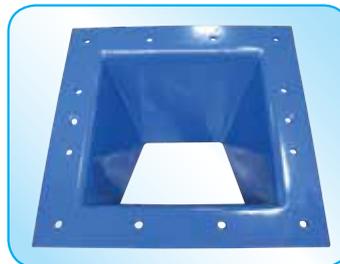

Carbon Steel
304 – 316 Stainless Steel
Wear proof rubber coated
Anti-wear material



COUNTERWEIGHT VALVE:

In this case activation of the flaps depends on the weight of the material. Therefore, operation is not always regular.

Application



VDC Double Dump Valves are the ideal solution for controlled discharging of powders or granular materials. They are mainly suitable for de-dusting and heavy-duty applications in virtually all industrial sectors. Designed for operating requirements such as high temperatures, highly abrasive materials and/or materials with large grain size. They are also suitable for integration into that do not require continuous material flow.



063002423 October 2013 Rights reserved to modify technical specifications.



www.wamgroup.com